





EV-M312 12V 140 040 12

EV-M312 24V 140 040 13

FUEL CUT-OFF SOLENOID VALVE

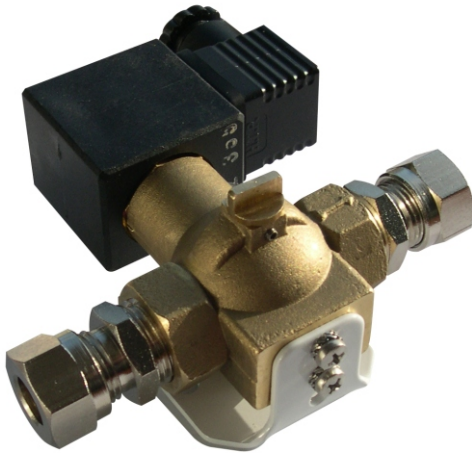

WIRING DIAGRAM

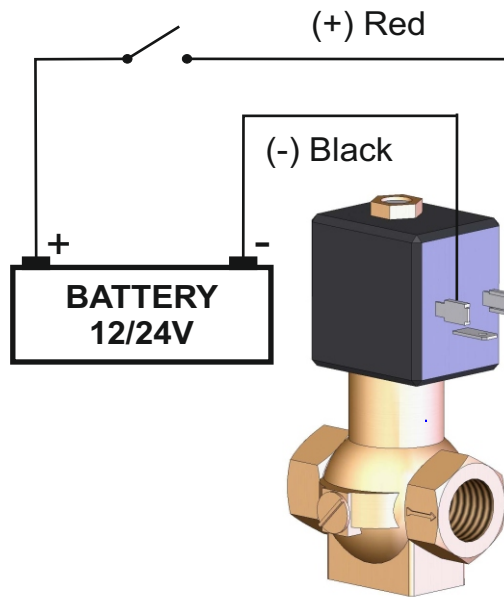

BAR	0,5	1	2	3
L/MIN	20	40	56	69

CODE	TYPE	V	A	Pmax	PORTS	HOLE	CONNECTIONS
140 040 12	EV-M312	12	1	3 bar	1/2"	12 mm	12 mm
140 040 13	EV-M312	24	0,55	3 bar	1/2"	12 mm	12 mm

The valve is normally closed. The valve opens applying the correct voltage at the solenoid (12V or 24V). Coil can be turned in every directions since it is fastened with a nut placed on the top. In case of electrical failure, the valve can be forced to open rotating clockwise (about 90°) the manual command knob.

In order to return back to electrical operation turn the knob anti-clockwise (about 90°)



WARNING

Please mind the arrow, on the brass body of the pump, indicates the direction of the liquid.

WARRANTY

- 1) The Warranty period is 2 years from date of purchase on production of the appropriate sales invoice.
- 2) Should the original sales invoice not be available, then the 2 year warranty period will be valid from date of production.
- 3) The Warranty becomes null and void in the case of incorrect utilization or disregard of the instructions contained herein.
- 4) The Warranty only covers original production defects.
- 5) The Warranty does not cover any related installation costs involved.
- 6) Transport costs are refundable only in the case where warranty has been duly recognized and accepted by Marco Spa. These costs will be limited to the actual shipment costs between Marco Spa warehouse and the client's delivery address.
- 7) No credit notes or replacement items will be issued prior to the receipt and proper testing of any Marco goods that are deemed faulty.