

## Portable Electric Outboard Motor Flusher Kit

### PRODUCT FEATURE


#### Specification:

Motor : DC-12V  
Capacity : 400GPH (1512LPH)  
Amp Draw : 12A  
Fuse Size : 20A  
Delivery Head : 32.5 FT (10M)  
Dimension : 430x180x260 mm  
(LXWXH) (16.93"x7.09"x10.24")  
Weight : 7kgs/pc  
Order No. : 503-6204061




#### After every outing, you need to flush out the engine.

- TMC Electric Outboard Motor Flusher Kit can keep your outboard in tip-top shape
- Efficiently flush away sand, dirt, salt and alkali to prevent clogging and corrosion and extends engine life.
- Portable feature make the engine flush operation easy; no confinement for space or water supply.

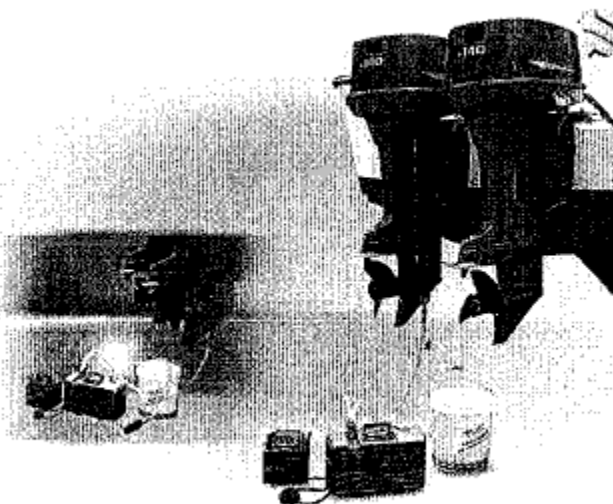

- Complete kit includes the following parts. Check the quantity and quality accordingly. Should you find any questions, please contact with your dealer or supplier.

No.	Description	Quantity	Remark
1	Plastic Case	1	430(L)x260(W)x180(H) mm
2	Segment Board	1	
3	Filter	1	
4	Control Switch Box	1	
5	Pump Control Cable	1	1.5M (L)
6	Alligator Clip (Red)	1	Positive (+)
	Alligator Clip (Black)	1	Negative (-)
7	Power Cable	1	3M (L)
8	Pump	1	DC-12V
9	Inlet w/ Connector	1	BSP 1/2"
10	Outlet w/ Connector	1	BSP 1/2"
11	Fast Connector	4	
12	Braiding Hose	2	I.D. 1/2" x 1.5M(L)
13	Water-Jet Nozzle	1	
14	Fuse	1	20A
15	Connector	1	BSP 3/4"
16	Connector	1	NPS 3/4"

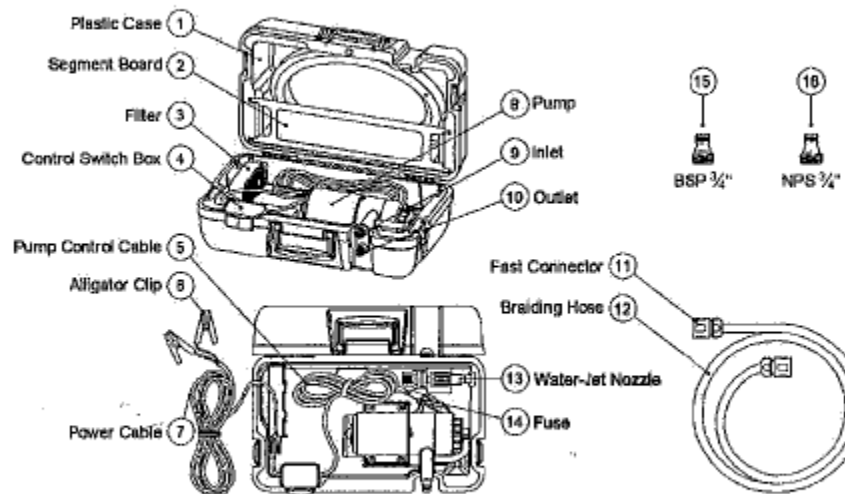

### SAFETY FEATURE

Read the Instruction Manual first before installation or operation.

**WARNING** : Improper operation may cause injury or risk of life.

**IMPORTANT** : Improper operation may cause performance obstacle or product damage.

#### ! WARNING

- Do not use the Product for gasoline or any flammable liquid.
- Do not pull, hang or put weight on the cable which may cause cable damage.
- Do not use the Product with damaged cable which may cause fire or short circuit.
- Do not run the Product Dry.
- Turn Off the switch if the Product is found short circuit or dry run.
- Do not touch the Product during or right after operation.
- Do not use needles or other metals to work as fuse.
- Do not use fuses other than the original design (20A).
- Fail to fuse the Product properly will void the warranty.

#### ! IMPORTANT

- Do not run the Product Dry.
- Lubricate the impeller with water at the first run or after some time of non-use of the Product.
- Do not dismantle, repair or change the Product without consulting the authorized technician or mechanics.
- Keep the children away during operation.
- The product can not be used for high volume pump out.
- To avoid motor from over heating, do not use the Product for continuous running over 10 minutes.
- Wait till the motor is fully cooled down (20 minutes after use) before you start the Product again.
- The Product is operated by DC-12V power. Use power other than original specification will damage the Product.
- Hook the wires properly. Red wire clip for the Positive and Black wire clip for the Negative.
- Do not make wire connections with wet hands.
- Be sure to stay clear of the prop and make sure no one tries to shift into gear.
- Keep the filter clean from debris. Filter stock may cause pump overheating and damage.