






D. 光形輻射圖

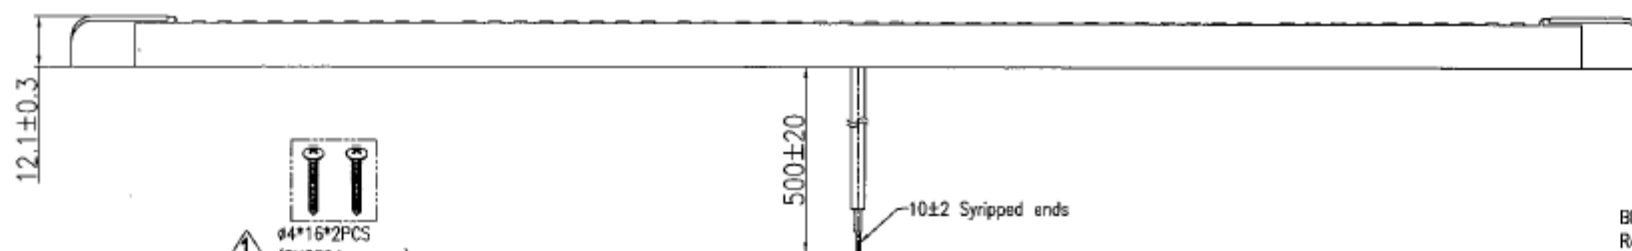


Rating	2	12V~24V DC(10~30V DC) / 12.5W Max.
Insulation Resistance		DC500V 100MΩ Min
Dielectric Strength		AC 500V 1Second
Operating Temperature		-20°C~+60°C
Lamp Life Cycle		6000 hrs
LED Type		3020 SMD LED(4000K)x75PCS
CCT		4000K±20%.
Max Illuminance	2	420Lux±20%/50Cm.
Luminous Flux	2	377 lm±20%.
Protection of Dust and Water		IP67
Beam angle	3	120°

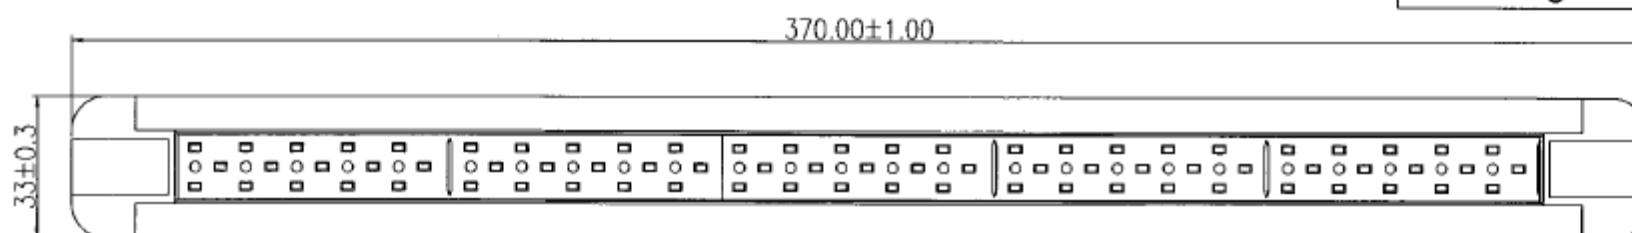

Black Wire (-)
Red Wire (+)

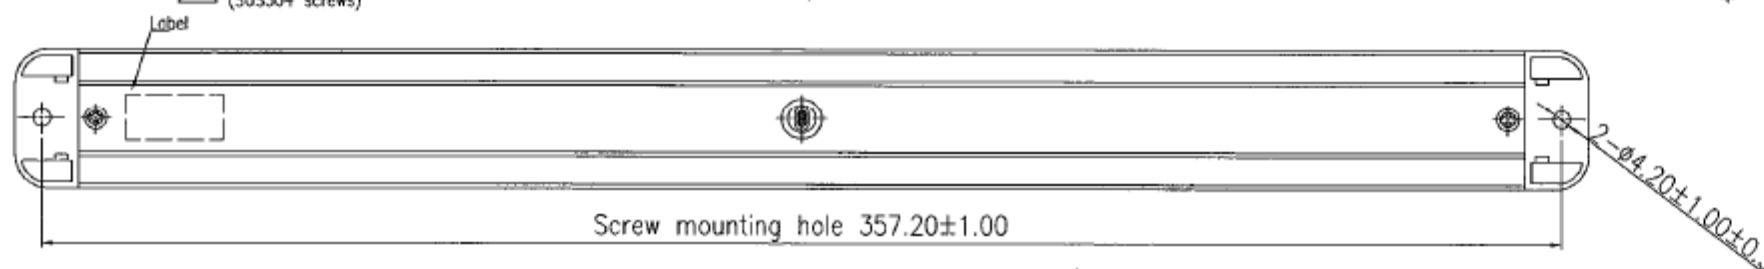

Material:
Housing: Aluminum.
Top cover: ABS, White.
Side cover: ABS, White.



09/26/'17			△	Draw	Check	Approval			Model Name	LED Interior Lamp	
09/14/'17			△						Model No.		
2017/03/09			△						Customer No.	13.197.05	
Date	Name	Descriptions	NO	09/26/'17			Unit	mm			Rev 3